



# ALPINO

## Kleurenkaart

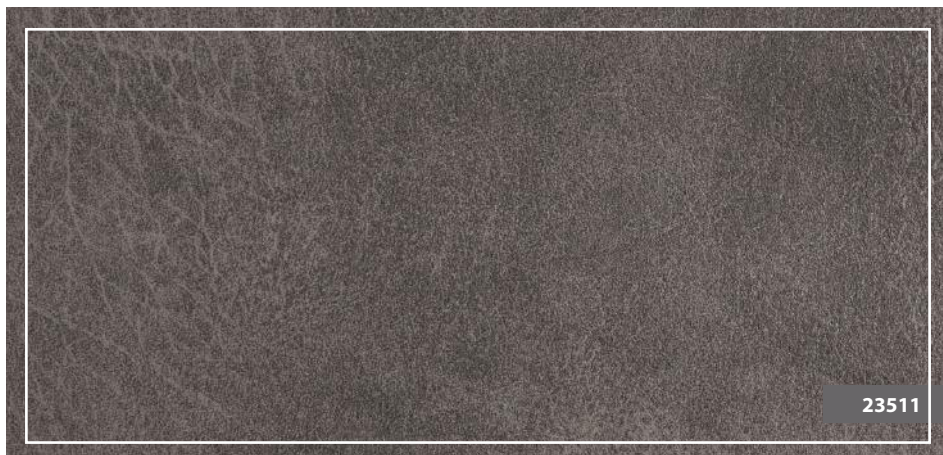

# ALPINO Kleurenkaart

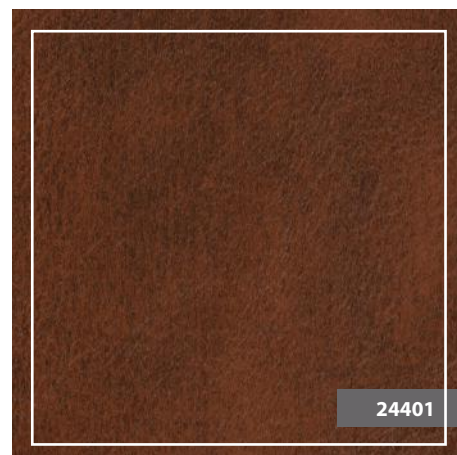

# ALPINO

## Kleurenkaart

### TECHNICAL PROPERTIES

Composition	76% PVC / 2% PU / 22% Polyester	EN 12127
Width	140+-3cm	
Weight	600 g/m2	
Roll Length	35 m	

### PHYSICAL PROPERTIES

Waterproof	Yes	EN 20811
Colour fastness to light outdoor	4-5	ISO 105 B04
Weathering UV test	3	ISO 4892-2
Colour fastness to chlorine, salt water	4	ISO 105 E03
Tensile strength (warp,weft) N(%)	250(30),563(62)	ISO 13934-1
Tensile elongation (warp, weft) (%)	41,43	ISO 1421
Tearing strength (warp, weft) N	29.5, 29.5	ISO 4674
Abrasion resistance (Martindale)	200.000 cycles	ISO 12947-2
Flexing endurance	No damage at 100.000 cycles	ISO 32100
Microbial and fungal resistance	Degree 1	ISO 846/AATCC 147
Extreme exposure temperatures	-23 °C / +80 °C	
Coating adhesion (warp, weft)	42,39	ISO 4211

### FR STANDARDS

France	Pass	NFP 503,504,505 M2
Germany	Pass	DIN 4102 B2
Italy	Pass	UNI 9185 Classe Uno
Europe	Pass	EN 1201-1
United Kingdom	Pass	BS 5852 Source 5 Crib 5
United Kingdom	Pass	BS 5852 Source 0 Cigarette
USA	Pass	NFPA 260A/UFAC Class 1
USA	Pass	CAL 117
Marine	Pass	IMO FTPC P8
Aeronautical	Pass	NY/NJ Port Authority FAR Part 25.853

### MANAGEMENT SYSTEMS

Environment and Health	Oekotex 100 Class IV REACH Certified Phthalate Free Bromine Free. No Halogenated FR Chemicals Non-Toxic No Bisphenol A (BPA)
------------------------	---

### CARE AND CLEANING INSTRUCTIONS

Clean regularly with a damp cloth, water and a mild soap. Do not use aggressive or abrasive detergents, nor wax.

*\*This information is not a guarantee and does not relieve the user from the responsibility of the proper and safe use of the product and all cleaning agents.*

*Please check compatibility when using this product in combination with painted or varnished surfaces.*

*\*CUERO takes no responsibility for the results of using such cleaning agents on the vinyl.*