


CATRIN


Kleurenkaart

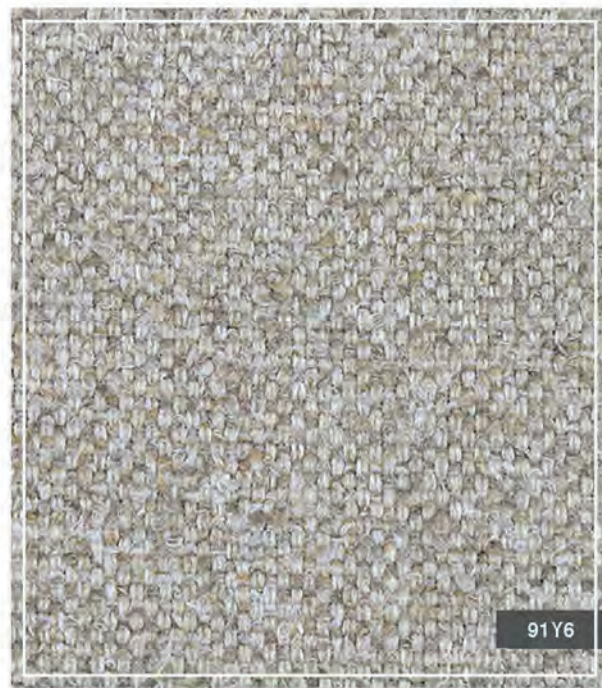

 **HUISLIJN**
www.huislijnkantoormeubelen.nl

CATRIN




Kleurenkaart

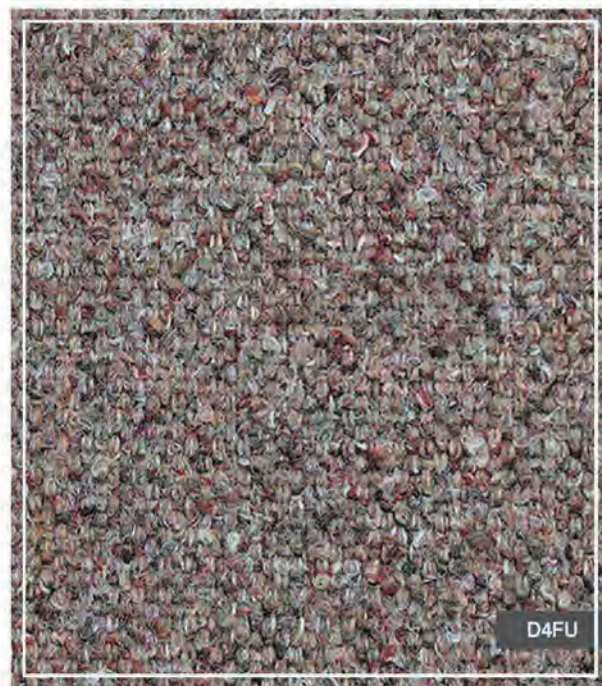

 **HUISLIJN**
www.huislijnkantoormeubelen.nl




CATRIN

Kleurenkaart

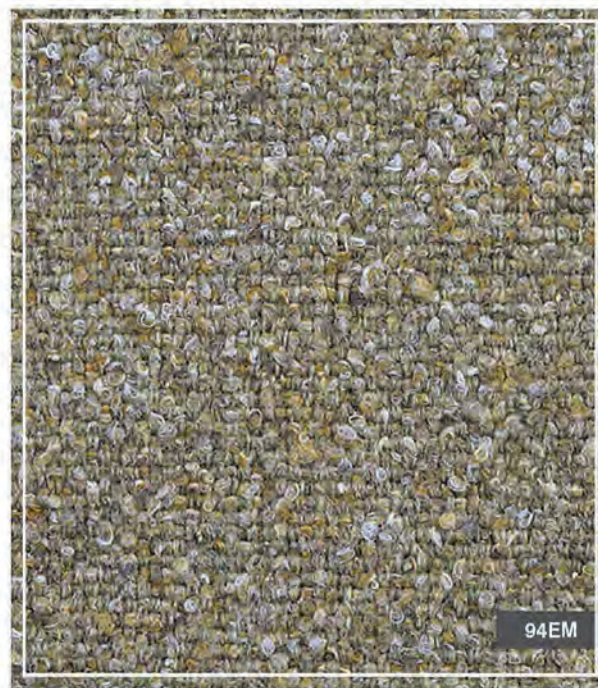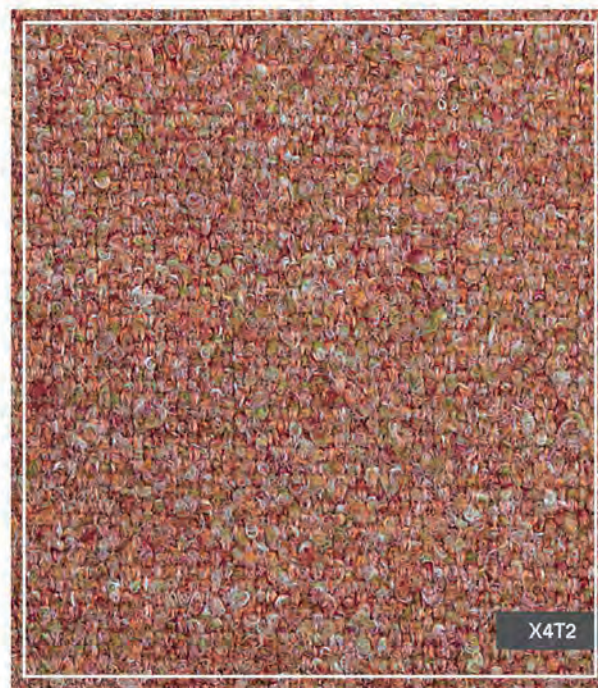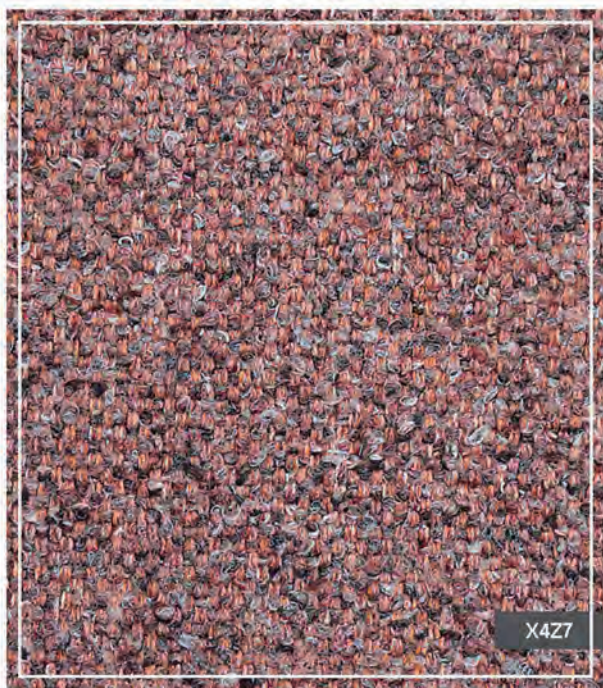




CATRIN

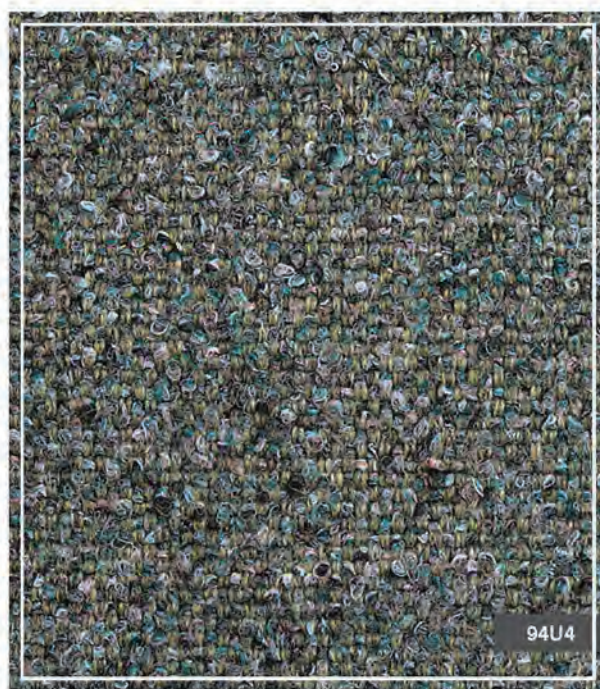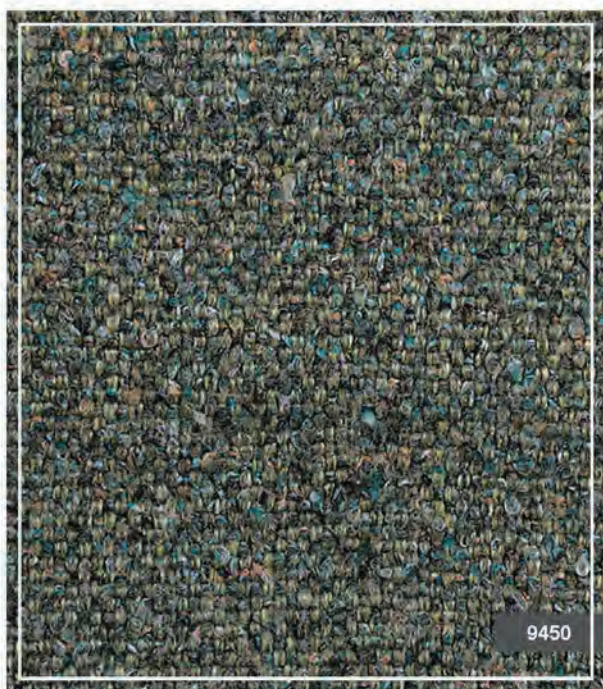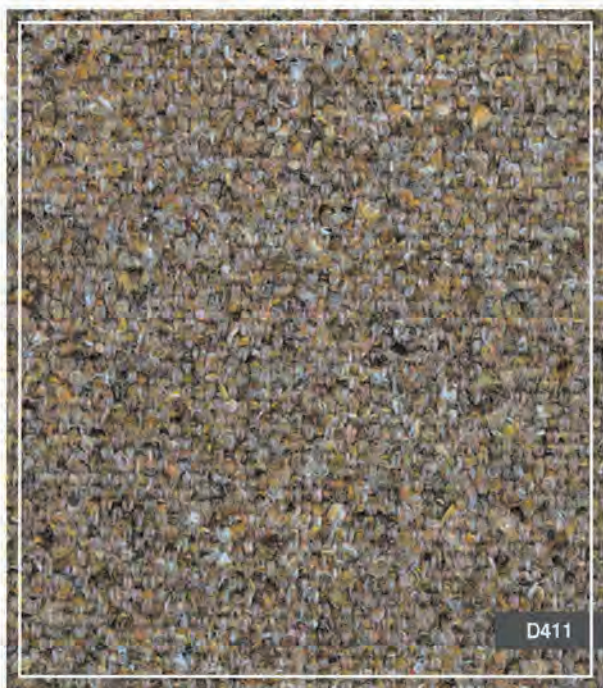


Kleurenkaart



CATRIN

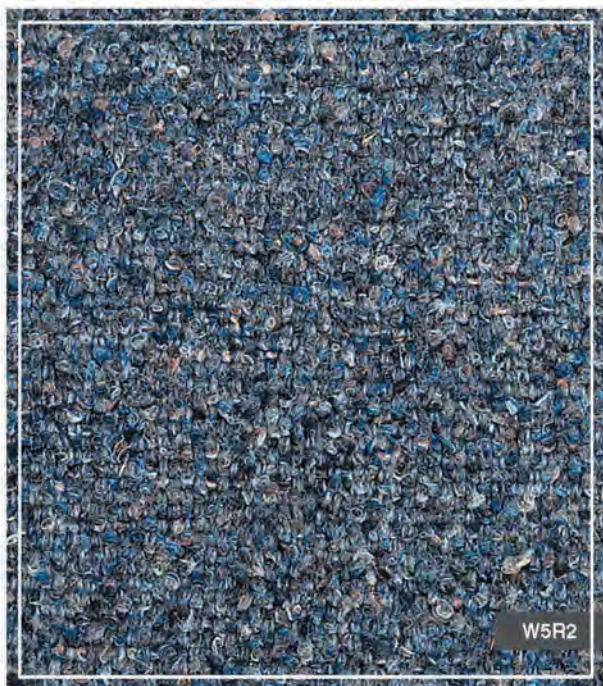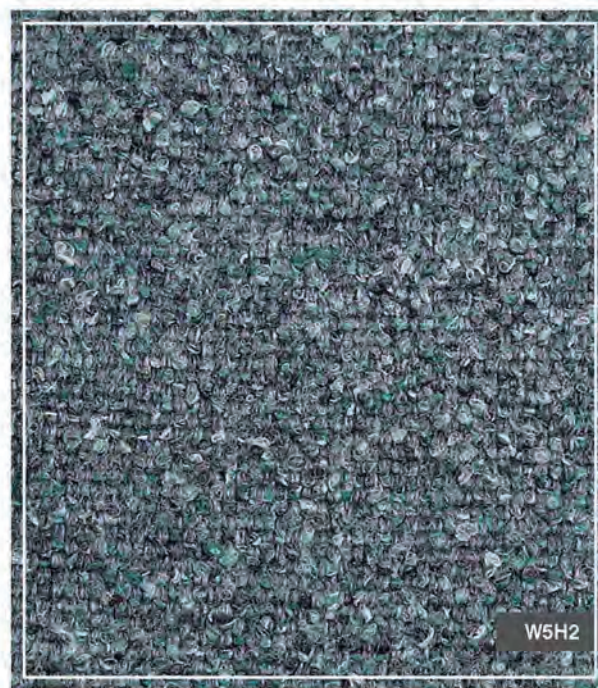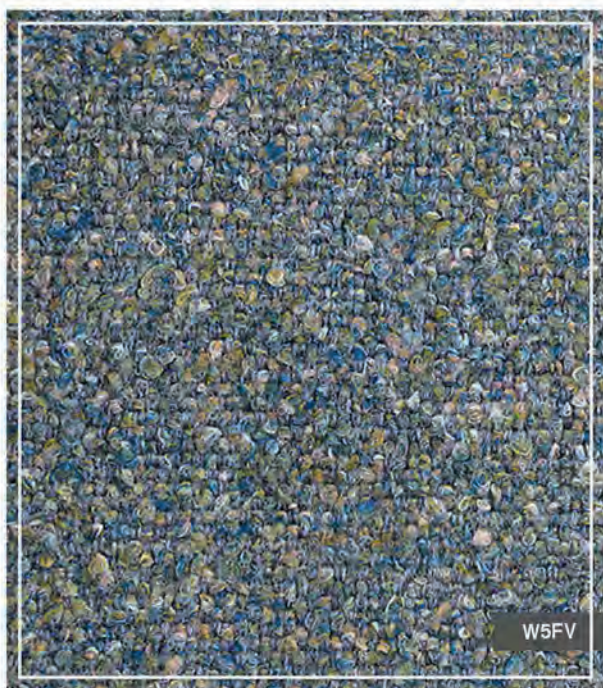Kleurenkaart



		<h2>LABORATORY TEST CERTIFICATE</h2>		Document No : FR.FTL.031-EN Rev.No/Date : 02 / 27.04.2023 Release Date : 05.05.2019 Page No : 1/1																																																																																					
Adress: İktelli Org. San. Böl. Mah. Eski Turgut Özal Cad. No:40 34490 Başakşehir / İstanbul Tel: 0 (212)5492630(PBX)																																																																																									
TEST INFORMATION Test Code : TNM195764 Laboratory Conditions : Sample is kept 18 hour under below conditions, Humidity(65 ±5%),Temperature(20 ±2)°C Test Standart : Fabric test are done according to BS EN ISO 14465:2003 standarts			Test Date : 24/04/2024 Test ID : 252538																																																																																						
GENERAL FABRIC INFORMATION Fabric Quality No/Name : 1811-A21CM RCS.CATRIN-A6 Design Code and Name : M2754/24 RCS.CATRIN 05 Colour (Varyant) : 91A6 End-Use : UPHOLSTERY FABRICS			FABRIC TECHNICAL DETAILS Composition : %100 ROLEFIN Weft Counts : 5 Warp Counts : 12 Width (Finished) (cm) : 139 Process Cod : PP-06X Weight (gr/m ²) (±%5) : 429 Fabric Type : Flat Fabric																																																																																						
PHYSICAL TESTS																																																																																									
<table border="1"> <thead> <tr> <th>Test Name</th> <th>Standarts</th> <th>Results</th> <th>Test Name</th> <th>Standarts</th> <th>Warp</th> <th>Weft</th> </tr> </thead> <tbody> <tr> <td>Martindale</td> <td>EN ISO 12947-2</td> <td>75000</td> <td>Seam Slippage</td> <td>EN ISO 13936-2</td> <td>1</td> <td>1.3</td> </tr> <tr> <td>Martindale 3.000 Cycle</td> <td>EN ISO 20105-A02</td> <td>4/5</td> <td>Tear Strength</td> <td>EN ISO 13937-3</td> <td>115</td> <td>105</td> </tr> <tr> <td>Wyzenbeek</td> <td>ASTM D4157</td> <td>50000</td> <td>Tensile Strength</td> <td>EN ISO 13934-1</td> <td>1525</td> <td>797</td> </tr> <tr> <td>Martindale-Pilling 2.000 Cycle</td> <td>EN ISO 12945-2</td> <td>4</td> <td>Opening Lamination</td> <td>EN ISO 13937-2</td> <td></td> <td></td> </tr> <tr> <td>Brush Pilling</td> <td>D3511-99A</td> <td>2/3</td> <td>Colour Fastness Rubbing</td> <td>EN ISO 105-X12(Dry/Wet)</td> <td>4/5</td> <td>4/5</td> </tr> <tr> <td>Brush Test</td> <td>Before</td> <td></td> <td>Colour Fastness Light- Europa</td> <td>EN ISO 105-B02</td> <td>5/6</td> <td></td> </tr> <tr> <td>Brush Test</td> <td>D3511-99A</td> <td></td> <td>Colour Fastness Light- U.S.A</td> <td>AATCC 16</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Colour Fastness Light</td> <td>EN ISO 105-B04</td> <td></td> <td></td> </tr> </tbody> </table>						Test Name	Standarts	Results	Test Name	Standarts	Warp	Weft	Martindale	EN ISO 12947-2	75000	Seam Slippage	EN ISO 13936-2	1	1.3	Martindale 3.000 Cycle	EN ISO 20105-A02	4/5	Tear Strength	EN ISO 13937-3	115	105	Wyzenbeek	ASTM D4157	50000	Tensile Strength	EN ISO 13934-1	1525	797	Martindale-Pilling 2.000 Cycle	EN ISO 12945-2	4	Opening Lamination	EN ISO 13937-2			Brush Pilling	D3511-99A	2/3	Colour Fastness Rubbing	EN ISO 105-X12(Dry/Wet)	4/5	4/5	Brush Test	Before		Colour Fastness Light- Europa	EN ISO 105-B02	5/6		Brush Test	D3511-99A		Colour Fastness Light- U.S.A	AATCC 16						Colour Fastness Light	EN ISO 105-B04																							
Test Name	Standarts	Results	Test Name	Standarts	Warp	Weft																																																																																			
Martindale	EN ISO 12947-2	75000	Seam Slippage	EN ISO 13936-2	1	1.3																																																																																			
Martindale 3.000 Cycle	EN ISO 20105-A02	4/5	Tear Strength	EN ISO 13937-3	115	105																																																																																			
Wyzenbeek	ASTM D4157	50000	Tensile Strength	EN ISO 13934-1	1525	797																																																																																			
Martindale-Pilling 2.000 Cycle	EN ISO 12945-2	4	Opening Lamination	EN ISO 13937-2																																																																																					
Brush Pilling	D3511-99A	2/3	Colour Fastness Rubbing	EN ISO 105-X12(Dry/Wet)	4/5	4/5																																																																																			
Brush Test	Before		Colour Fastness Light- Europa	EN ISO 105-B02	5/6																																																																																				
Brush Test	D3511-99A		Colour Fastness Light- U.S.A	AATCC 16																																																																																					
			Colour Fastness Light	EN ISO 105-B04																																																																																					
FLAMMABILITY TESTS																																																																																									
<table border="1"> <thead> <tr> <th>Test Name</th> <th>Standarts</th> <th>Results</th> <th>Test Name</th> <th>Standarts</th> <th>Results</th> </tr> </thead> <tbody> <tr> <td>Cigarette Test</td> <td>BS 5852 PART 1 SOURCE 0</td> <td>PASS</td> <td>Cigarette-Match-Crib 5 Test</td> <td>BS 7176 MEDIUM HAZARD</td> <td></td> </tr> <tr> <td>Match Testi</td> <td>BS 5852 PART 1 SOURCE 1</td> <td></td> <td>Cigarette-Match-Crib 5 Test</td> <td>BS 7176 MEDIUM HAZARD FR TREATED</td> <td></td> </tr> <tr> <td>Match Testi</td> <td>BS 5852 PART1 SOURCE1 FR TREATED</td> <td>PASS</td> <td>Cigarette Test</td> <td>CALL 117</td> <td>PASS</td> </tr> <tr> <td>Crib 5</td> <td>BS 5852 Part2 Source 5</td> <td></td> <td>Cigarette Test</td> <td>NFPA 260</td> <td>PASS</td> </tr> <tr> <td>Crib 5</td> <td>BS 5852 PART2 SOURCE5 WITH TREATED</td> <td></td> <td>M Testi</td> <td>NF P 92 5XX (M1)</td> <td></td> </tr> <tr> <td>Cigarette Test</td> <td>EN 1021-1</td> <td>PASS</td> <td>M Testi</td> <td>NF P 92 5XX (M2)</td> <td></td> </tr> <tr> <td>Match Testi</td> <td>EN 1021-2</td> <td></td> <td>M Testi</td> <td>NF P 92 5XX (M3)</td> <td></td> </tr> <tr> <td>Match Testi</td> <td>EN 1021-2 FR TREATED</td> <td>PASS</td> <td>B Testi</td> <td>DIN 4102 (B1)</td> <td></td> </tr> <tr> <td>Cigarette-Match Test</td> <td>IMO PART 8</td> <td></td> <td>B Testi</td> <td>DIN 4102 (B2)</td> <td></td> </tr> <tr> <td>Cigarette-Match Test</td> <td>IMO PART 8 FR TREATED</td> <td>PASS</td> <td>Annex 6 Horizontal Burning</td> <td>ECER 118 03</td> <td></td> </tr> <tr> <td>Cigarette-Match Test</td> <td>BS 7176 LOW HAZARD</td> <td></td> <td>Annex 7 Melting</td> <td>ECER 118 03</td> <td></td> </tr> <tr> <td>Cigarette-Match Test</td> <td>BS 7176 LOW HAZARD FR TREATED</td> <td>PASS</td> <td>Annex 8 Vertical Burning</td> <td>ECER 118 03</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>Flammability Test</td> <td>UNI 9175</td> <td></td> </tr> </tbody> </table>						Test Name	Standarts	Results	Test Name	Standarts	Results	Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS	Cigarette-Match-Crib 5 Test	BS 7176 MEDIUM HAZARD		Match Testi	BS 5852 PART 1 SOURCE 1		Cigarette-Match-Crib 5 Test	BS 7176 MEDIUM HAZARD FR TREATED		Match Testi	BS 5852 PART1 SOURCE1 FR TREATED	PASS	Cigarette Test	CALL 117	PASS	Crib 5	BS 5852 Part2 Source 5		Cigarette Test	NFPA 260	PASS	Crib 5	BS 5852 PART2 SOURCE5 WITH TREATED		M Testi	NF P 92 5XX (M1)		Cigarette Test	EN 1021-1	PASS	M Testi	NF P 92 5XX (M2)		Match Testi	EN 1021-2		M Testi	NF P 92 5XX (M3)		Match Testi	EN 1021-2 FR TREATED	PASS	B Testi	DIN 4102 (B1)		Cigarette-Match Test	IMO PART 8		B Testi	DIN 4102 (B2)		Cigarette-Match Test	IMO PART 8 FR TREATED	PASS	Annex 6 Horizontal Burning	ECER 118 03		Cigarette-Match Test	BS 7176 LOW HAZARD		Annex 7 Melting	ECER 118 03		Cigarette-Match Test	BS 7176 LOW HAZARD FR TREATED	PASS	Annex 8 Vertical Burning	ECER 118 03					Flammability Test	UNI 9175	
Test Name	Standarts	Results	Test Name	Standarts	Results																																																																																				
Cigarette Test	BS 5852 PART 1 SOURCE 0	PASS	Cigarette-Match-Crib 5 Test	BS 7176 MEDIUM HAZARD																																																																																					
Match Testi	BS 5852 PART 1 SOURCE 1		Cigarette-Match-Crib 5 Test	BS 7176 MEDIUM HAZARD FR TREATED																																																																																					
Match Testi	BS 5852 PART1 SOURCE1 FR TREATED	PASS	Cigarette Test	CALL 117	PASS																																																																																				
Crib 5	BS 5852 Part2 Source 5		Cigarette Test	NFPA 260	PASS																																																																																				
Crib 5	BS 5852 PART2 SOURCE5 WITH TREATED		M Testi	NF P 92 5XX (M1)																																																																																					
Cigarette Test	EN 1021-1	PASS	M Testi	NF P 92 5XX (M2)																																																																																					
Match Testi	EN 1021-2		M Testi	NF P 92 5XX (M3)																																																																																					
Match Testi	EN 1021-2 FR TREATED	PASS	B Testi	DIN 4102 (B1)																																																																																					
Cigarette-Match Test	IMO PART 8		B Testi	DIN 4102 (B2)																																																																																					
Cigarette-Match Test	IMO PART 8 FR TREATED	PASS	Annex 6 Horizontal Burning	ECER 118 03																																																																																					
Cigarette-Match Test	BS 7176 LOW HAZARD		Annex 7 Melting	ECER 118 03																																																																																					
Cigarette-Match Test	BS 7176 LOW HAZARD FR TREATED	PASS	Annex 8 Vertical Burning	ECER 118 03																																																																																					
			Flammability Test	UNI 9175																																																																																					
REPELLENCY / CLEANABILITY TESTS																																																																																									
<table border="1"> <thead> <tr> <th>Test Name</th> <th>Standarts</th> <th>Results</th> <th>Test Name</th> <th>Standarts</th> <th>Results</th> </tr> </thead> <tbody> <tr> <td>Antibacterial Test</td> <td>ASTM E 2149-13</td> <td></td> <td>Spray Test</td> <td>EN ISO 4920</td> <td></td> </tr> <tr> <td>Antiviral Test</td> <td>ISO 18184</td> <td></td> <td>Liquid Repellency</td> <td>AATCC 193</td> <td></td> </tr> <tr> <td>Air Permability</td> <td>ISO 9237</td> <td></td> <td>Oil Repellency</td> <td>AATCC 118</td> <td></td> </tr> <tr> <td>Bleach Cleanable Test</td> <td>ACT TM1.2020 PART 1</td> <td>PASS</td> <td>Phenolic Yellowing</td> <td>EN ISO 105-X18</td> <td></td> </tr> <tr> <td>Colour fast to chlorinated wat</td> <td>EN ISO 105-E03</td> <td></td> <td rowspan="2">Dimensional Stability-30 °C</td> <td>Before Ironing Warp/Weft (%)</td> <td>1</td> </tr> <tr> <td>Colour Fast. To Washing</td> <td>EN ISO 105-C06</td> <td></td> <td>After Ironing Warp/Weft (%)</td> <td>1</td> </tr> </tbody> </table>						Test Name	Standarts	Results	Test Name	Standarts	Results	Antibacterial Test	ASTM E 2149-13		Spray Test	EN ISO 4920		Antiviral Test	ISO 18184		Liquid Repellency	AATCC 193		Air Permability	ISO 9237		Oil Repellency	AATCC 118		Bleach Cleanable Test	ACT TM1.2020 PART 1	PASS	Phenolic Yellowing	EN ISO 105-X18		Colour fast to chlorinated wat	EN ISO 105-E03		Dimensional Stability-30 °C	Before Ironing Warp/Weft (%)	1	Colour Fast. To Washing	EN ISO 105-C06		After Ironing Warp/Weft (%)	1																																											
Test Name	Standarts	Results	Test Name	Standarts	Results																																																																																				
Antibacterial Test	ASTM E 2149-13		Spray Test	EN ISO 4920																																																																																					
Antiviral Test	ISO 18184		Liquid Repellency	AATCC 193																																																																																					
Air Permability	ISO 9237		Oil Repellency	AATCC 118																																																																																					
Bleach Cleanable Test	ACT TM1.2020 PART 1	PASS	Phenolic Yellowing	EN ISO 105-X18																																																																																					
Colour fast to chlorinated wat	EN ISO 105-E03		Dimensional Stability-30 °C	Before Ironing Warp/Weft (%)	1																																																																																				
Colour Fast. To Washing	EN ISO 105-C06			After Ironing Warp/Weft (%)	1																																																																																				
Colour Fastness To Sea water - EN ISO 105 E02			Colour Fast. To Perspiration - ISO 105-E04																																																																																						
Shade Change			Shade Change																																																																																						
Staining			Staining																																																																																						
Acetate Cotton Nylon Poly. Acrylic Wool			Acetate Cotton Nylon Poly. Acrylic Wool																																																																																						
Acid			Alkaline																																																																																						
Easylife			Easylife Notes																																																																																						
																																																																																									
																																																																																									
All tests results mentioned in this form are for the objective of sustaining quality during production stages. They stand as a reference for our production subunits. However Kets cannot be held responsible in any case for the results mentioned in this report. We recommend our customers to have our fabrics tested in independent accredited laboratories to make sure the quality of the fabric they intend to buy fits their own quality requirements.																																																																																									